

Notice of Intent to Remove Asbestos

Case #: 24-870

11815 NE 99th Street, Suite 1294

Vancouver, WA 98662 Voice: 360-574-3058 Fax: 360-576-0925

Web: https://www.swcleanair.gov Email: Tina@swcleanair.gov

Reviewed by SWCAA: Brian Fallon

Date Received: 12/20/2024

Amendment: 0

Date Paid:

12/20/2024

SWCAA Fee:

\$369.00

168061791

This notification MUST be present at all times at the asbestos project sit	Receipt #:
--	------------

	ar Feet Workshift	days: W nours: 8:00AM - 4:30PM
Project starting date: 1/1/2025 Project Completion date:	e: 1/1/2025 Workshift i	10013. 8.00AW - 4.50PW
ite Name: Family Residence	Site address: 20532 NE 194th Ave	
ocation of Asbestos: Living Room, Kitchen	ty/State/Zip: Battle Ground	WA 98604
Demolition of Structure (Notification of Demolition required)	County: CLARK CO	DUNTY
✓ Asbestos survey conducted? No survey reasons	n:	
AHERA Inspector: Joel Dillard	Certification #:	193865
	Sheet Vinyl	ion Duct Tape VAT
 ☐ Duct Paper ☐ Mag Pipe Insulation ✓ Other Sheetrock Mud and mastic 	All Cell — CA ripe	□ VAI
Control Methods:		
▼ N.P Enclosure	Wrap and Cut	☐ HEPA Vac
✓ Other Manual Methods		
sbestos Contractor: Keystone Contracting, Inc.	Phone: 360-887-0	868
Mailing Address: 417 NW 209th St, Ridgefield, WA, 98642	Email: keystone4	17@tds.net
Certification ##: ABCN00001024		
Supervisor: Martin Ortiz	Phone: 360-353-6423	
roperty Owner: Julie Risto	Phone: 360-521-5361	
Mailing Address: 20532 NE 194th Ave, Battle Ground WA 98	504	
sbestos Disposal Site: Wasco County Landfill: 2550 Steele Rd,	he Dalles, OR, 97058-	

TO THE BEST OF MY KNOWLEDGE, ACCURATE AND COMPLETE.

Submitter Name:	Kamala Lopez	Representing:	Keystone Contracting, Inc
Submitter Title:	Office Manager	Date Submitted	: 12/20/2024
Reviewed by SWC	AA: Brian Fallon		✓ Approved



Notice of Intent to Remove Asbestos

Case #: 24-870

Amendment: 0

11815 NE 99th Street, Suite 1294 Vancouver, WA 98662

Voice: 360-574-3058 Fax: 360-576-0925

Web: https://www.swcleanair.gov Email: Tina@swcleanair.gov Date Received: 12/20/2024

Date Paid: 12/20/2024

SWCAA Fee: \$369.00

3003.00

168061791

Receipt #:

This notification MUST be present at all times at the asbestos project sit



Asbestos Survey Report



Presented To: Julie Risto

Survey Location: 20532 NE 194th Ave, Battle Ground, WA 98604

Inspection Date: December 19th 2023

Prepared by:

Joel Dillard
Of
Atlas Labs Inc.
Environmental Testing Services
CCB #: 231684



1.0 EXECUTIVE SUMMARY

2.0 GENERAL INFORMATION

- 2.1 Project Information
- 2.2 Procedures
 - 2.2.1 Plan and Specification Review
 - 2.2.2 Walk Through and Visual Survey
 - 2.2.3 Bulk Sampling
 - 2.2.4 Analyses of Bulk Samples
- 3.0 CONTROLLING
 - 3.1 Removal and Disposal
 - 3.2 Encapsulation
 - 3.3 Enclosure
 - 3.4 Repair
 - 3.5 Operations and Maintenance Programs
- 4.0 Material Quantifications
 - 4.1 Homogenous Materials/Areas
- 5.0 Qualifications of the Report

APPENDICES

APPENDIX A - Laboratory Results of Suspect Asbestos Bulk Sample Analyses

APPENDIX B - Suspect Asbestos Containing Material Sample Locations/Drawings

APPENDIX C - EPA / AHERA Building Inspector Certification



Building/Structure Information

Owner/Operator Name: Julie Risto
Owner/Operator Number: (360) 521-5361
Survey Date: December 19th 2023
What is the building's description? Residence
What is this structure's current use? Residential
What is this structure's past use? Residential
Building Square Footage: 1,780'
Number of Floors: 2
Area Surveyed: Whole House
Approximate Build Date: 1920



1.0 EXECUTIVE SUMMARY

Atlas Labs Inc. has performed this work to aid in the demolition of the residence located at 20532 NE 194th Ave Battle Ground, WA 98604. This survey included visual observation, materials sampling and laboratory analyses of materials suspected of containing asbestos. The locations of the suspect materials are noted and documented in this report.

A total of twenty-nine (29) sample sets, thirty-seven (37) total samples were taken during this survey; laboratory procedure will be the separation of multiple layered samples and analysis of individual layers. Twenty-nine (29) material sample sets were collected and delivered to Atlas Labs Inc. Atlas laboratories divided these samples into eighty-eight (88) separate layers for individual analysis. The samples of suspect asbestos containing materials included: texture, fiberboard, ceiling tile, mastic, plaster, drywall, joint compound, vinyl, brick, mortar, sealant, wallpaper, VCT, tile, wall panel, stove vent pipe sealant, window glaze, siding, shingle & tar paper.

Of the thirty-seven (37) asbestos samples taken, eleven (11) of the suspect materials contained asbestos in quantities greater than 1% by weight, the asbestos containing materials are listed in section 4.0 - Asbestos containing materials were identified during this inspection. (texture, joint compound vinyl, mastic & window glaze)

Removal, encapsulation, enclosure, and an Operations and Maintenance (O&M) Program are all recognized alternatives for controlling asbestos containing materials in buildings. Federal OSHA and EPA regulations require removal of most asbestos containing materials from a building prior to demolition or before any planned renovation activities, which may disturb asbestos containing materials. Federal OSHA and EPA regulations require proper handling of lead containing materials in construction. Proper handling of these materials depends greatly on the activities that will impact them.

Atlas Labs Inc. recommends that all asbestos-containing materials identified during this survey that may be affected by the work be removed by a licensed asbestos abatement contractor operating under a technical specification.

2.0 GENERAL INFORMATION

2.1 PROJECT INFORMATION

The structure is located at 20532 NE 194th Ave Battle Ground, WA 98604. The structure is a two level residence built in 1920; construction is of standard stick frame with interior walls of drywall. Roofing consists of shingles over tar paper.

2.2 PROCEDURES

The services provided in this phase of work included a visual survey of the building, material sampling, laboratory analysis for the presence of asbestos. The following sections discuss the general procedures employed for each of these tasks.



2.2.1 Plan and Specification Review

A survey to locate asbestos-containing materials is best served by a review of building plans and specifications to determine the type of construction used and the materials specified. No building plans and specifications were provided for review.

2.2.2 Walk Through and Visual Survey

The asbestos identification program began with a walk-through and visual survey of the building. The survey included observation of wall and ceiling finishes, various flooring materials, piping, structural building components, and above-ceiling areas. The primary purpose of the visual survey was to locate and identify friable and non-

friable asbestos materials and devise a sampling strategy. "Friable" materials are those that can be crumbled by hand pressure, releasing fibers into the air.

2.2.3 Bulk Sampling

The next phase of the survey was the selection of sampling areas and collection of bulk samples. Material sampling areas were grouped based on material homogeneity. A homogeneous area is one which contains material that seems by texture, color and surface wear to be uniform and applied during the same general time period. To refute the presumption that materials installed prior to 1982 contain asbestos, multiple samples of similar suspect materials were collected to meet the requirements of EPA and OSHA regulations.

Samples were collected from accessible, representative construction materials, which were suspected to contain asbestos. Suspect materials observed and sampled included: texture, fiberboard, ceiling tile, mastic, plaster, drywall, joint compound, vinyl, brick, mortar, sealant, wallpaper, VCT, tile, wall panel, stove vent pipe sealant, window glaze, siding, shingle & tar paper.

Samples were labeled, and appropriate chain-of-custody documentation was completed. The samples were sent to Atlas Laboratories in Vancouver, WA for analysis.

2.2.4 Analyses of Bulk Samples

Asbestos samples were analyzed using Polarized Light Microscopy (PLM) coupled with dispersion staining in general accordance with the Environmental Protection Agency's (EPA) "Method for the Determination of Asbestos in Bulk Building Materials" (EPA/600/R-93/116, July 1993).

Polarized Light Microscopy is the only analytical method presently used to identify asbestos that employs the optical crystallographic properties of the various crystalline forms in the samples. These properties: refractive indices, birefringence, sign of elongation, and extinction angle, are unique to the individual crystalline forms and therefore is used to identify the different asbestos mineral types: Chrysotile, Amosite, Crocidolite, Anthophyllite, Tremolite, and Actinolite.



The current NESHAP regulations (40 CFR Part 61, dated November 20, 1990) clarify the analytical procedures for determining the percentage of asbestos in bulk samples and permit the use of visual area estimation. The regulations further indicate the regulated asbestos-containing materials (RACM) – materials that are friable or may become friable, may be further analyzed by point counting when the results indicate less than 10 percent asbestos by visual area estimation. The laboratory utilizes visual area estimation on a routine basis and does not include point counting unless specifically requested.

3.0 ALTERNATIVES FOR CONTROLLING ACM

There are five industry-recognized alternative procedures to control exposure to asbestos-containing materials: (1) removal and disposal; (2) encapsulation; (3) enclosure; (4) repair; and (5) an operations and maintenance (O&M) program. The selection of a particular alternative should be based on the intended usage of the facility, on the condition and location of the asbestos-containing material, and on business considerations.

Atlas Labs Inc. understands that the plan for demolition of this structure is to remove all known asbestos containing materials that are present. Air monitoring and clearance sampling should be done throughout this project to ensure compliance with regulatory requirements and worker safety. Regardless of the alternative chosen, all asbestos-related mitigation activities should be conducted under properly controlled conditions by specially trained personnel. Asbestos removal should be performed by a licensed asbestos abatement contractor operating under the guidelines of strict specifications. All asbestos-containing materials, even when removed in the course of maintenance activities, must be properly disposed of as asbestos containing waste in accordance with all state and federal regulations regarding abatement, transportation and disposal of asbestos containing materials.

3.1 REMOVAL AND DISPOSAL

Removal of the asbestos-containing material is the only permanent solution to the problem posed by exposure to asbestos fibers. Removal should be seriously considered when the material is extremely friable, badly damaged or when the material is readily accessible to people or staff. The EPA also requires removal before demolition of a facility or before renovation activities, which may disturb the asbestos-containing material. The Occupational Safety and Health Administration (OSHA) have specific requirements addressing the removal of asbestos-containing materials.

3.2 ENCAPSULATION

Encapsulation of asbestos-containing material is a temporary measure designed to reduce fiber emissions from the material. This alternative is recommended when the asbestos-containing material is in stable, relatively undamaged condition and presents little exposure potential. Encapsulation is considered a temporary measure because the asbestos-containing material still exists in the facility and care must always be taken to avoid disturbing it. The presence and location of the material should be documented and



periodic inspections of the encapsulated areas should be made to ensure that no deterioration or damage has occurred.

3.3 ENCLOSURE

Enclosure requires surrounding the asbestos-containing material with an airtight seal or barrier to prevent any fibers released by the material from reaching facility occupants. This method is practical when asbestos-containing materials are difficult, if not impossible, to remove or encapsulate. Again, the location of the materials should be documented, periodic inspections performed, and a record keeping system implemented.

3.4 REPAIR

Repair of asbestos-containing materials is a temporary measure designed to minimize local fiber emissions from the material. Typically, repair is utilized for minimally damaged Thermal System Insulation (TSI) and wall and ceiling materials. Repair should only be used if the repair is technologically feasible and human health and the environment can be protected. Repair is also considered a temporary measure because the asbestos-containing material still remains in the building.

3.5 OPERATIONS AND MAINTENANCE PROGRAM

An Operations and Maintenance (O&M) Program is established to monitor the condition of the asbestos-containing materials and promote safe work practices within the facility. The O&M Program should include notification of the building occupants and workers of the presence and locations of the asbestos-containing materials, training of maintenance personnel in proper cleaning and maintenance procedures, periodic air monitoring in affected areas, and regularly scheduled re-inspections of the asbestos-containing materials. Proper records documenting these efforts must also be maintained.

These recommendations are further elaborated by the EPA in "Managing Asbestos In-Place – A Building Owner's Guide to Operations and Maintenance Programs for Asbestos-Containing Materials (EPA 20T-2003, July, 1990).

The Occupational Safety and Health Administration (OSHA) regulation 29 CFR 1926.1101 took effect October 1, 1995. This regulation requires building owners/employers to either identify asbestos-containing material by surveying and bulk sampling, or by treating certain building materials as "Presumed Asbestos-Containing Materials (PACM)". Specifically, all thermal system insulation (TSI) and surfacing materials in buildings constructed prior to 1980 should be considered PACM and resilient flooring materials installed prior to 1980 should be assumed ACM. The presence of ACM or PACM requires the owner/employer to notify employees of the presence, provide training, and follow certain procedures when employees come in contact with such materials.



4.0 QUANTIFICATION TABLE

The following table indicates the approximate quantity of asbestos containing material identified at the Site.

Sample #	Containing Material Sq.		Approx. Sq. Footage	Friable Y/N	Condition	
5-A Layer 2	Living Room Wall	Texture (Off White)	2% Chrysotile	200'	Υ	Good
5-A Layer 3	Living Room Wall	Joint Compound (Off White)	2% Chrysotile	_	Υ	Good
5-B Layer 2	Living Room Texture 2% Chrysotile Wall (Off White)		Y	Good		
5-C Layer 2	Living Room Texture 2% Chrysotile _		-	Y	Good	
12-A Layer 1	Kitchen Closet Shelf			Y	Good	
20-A Layer 1	Kitchen Floor	Kitchen Vinyl 25%		140'	Y	Good
20-A Layer 2	Kitchen Floor	Mastic (Tan)	tic 2% Chrysotile _		N	Good
20-A Layer 3	Kitchen Floor	nen Vinyl 25% Chrysotile _		Y	Good	
20-A Layer 4	Kitchen Mastic 2% Chrysotile _		_	N	Good	
24-A Layer 1	Attic Bedroom Closet Floor			3'	Y	Good
25-A Layer 1	Left Exterior Window	Window Glaze (Grey)	2% Chrysotile	Unk.	Y	Good

4.1 Homogenous Materials/Areas

The following table indicates the Homogeneous Materials/Areas.

Sample Set #	Material	Rooms/Areas
1-A Texture		Entry/Living Room/Music Room/Office
2-A	Ceiling Tile	Entry/Living Room/Music Room/Office
9-A	9-A Flooring Living Room/Office/Music Room	
25-A	Window Glaze	Exterior Wood Windows



5.0 QUALIFICATIONS OF THE REPORT

Atlas Labs Inc. has endeavored to investigate the existing conditions within the subject building using standard accepted procedures. The asbestos survey scope of work is intended to identify asbestos-containing materials associated with the subject property. Regardless of the thoroughness of a survey, it is possible that some areas of asbestos-containing materials were overlooked or inaccessible, or are different from those at specific sample locations. Wall voids, building cavities, and mechanical equipment may contain unreported asbestos. In addition, renovation or construction may uncover altered or differing conditions. If a suspect material was not specifically sampled or does not appear to be represented by a similar material previously sampled, it should be analyzed prior to disturbance.

It should be noted that floor tiles and other resinous bound materials, when analyzed by the EPA method for asbestos, may yield false negative results because of limitations in separating closely bound fibers and in detecting fibers of small length and diameter. If a definitive result is required, Atlas Labs Inc. recommends utilizing alternative methods of identification, including Transmission Electron Microscopy (TEM).

This report presents the general descriptions of various construction materials and general locations where these materials were encountered. If questions arise during the planning of demolition, renovation or construction projects concerning the presence of asbestos-containing materials, we should be notified in order to view the conditions and present recommendations.

This report has been prepared on behalf of, and exclusively for the use of Julie Risto. This report and the findings herein shall not, in whole or in part, be disseminated or conveyed to any other party, or be used or relied upon by any other party, without the consultant's prior written consent by Atlas Labs Inc.

A copy of this survey report must be kept onsite during any remediation, renovation or demolition activities, as required by Southwest Clean Air Agency.

If you have any questions about this information, please call our office at (360) 852-8936

Survey Performed By: Joel Dillard

AHERA Building Inspector - Certification: # IN-23-1415C

Contact Info: Joel@atlaslabinc.com Cell Phone: (360) 949-2984

Sincerely,

Foel Dillard



APPENDIX A

Atlas Laboratories Inc. 14795 SW 72nd Ave, STE B Portland,OR 97224 (503) 430-5290 www.atlaslabsinc.com CCB #231684



Full Survey Chain of Custody

Name / Company Name: Julie Risto	Phone: 360-52	21-5361									
Contact Email: joolie125@msn.com											
Project Name: N/A	Project Name: N/A Batch: 22 - 103 100 1										
Lab/Dusia et Addus es 00520 NE 404th	A D-41- O		2.4		100.0						
Job/Project Address: 20532 NE 194th	Ave, Battle Gre	ound, WA 9860	04								
Inspector: Joel Dillard Ph: (360) 949	-2984 AHERA	Cert. # IN-2314	15-C Lead RRP	Cert. # R-I-41R0	36-23-0058	8					
Survey Area Use: Residential	Approx. Year	Built: 1920	Reason for	Survey: Demo	olition	Sq. Ft. 1,780					
Rush Next Day 2-Day Z 5-Day Rush Other											
# Material Descriptio	n	Friable Y/N	Loca	tion	Condition	Approx. SQ FT.					
1-A Texture		Υ	Living Ro	om Wall	Good	500'					
1-B Texture		Υ	Living Ro	om Wall	Good	-					
1-C Texture		Υ	Living Room Wall G		Good	-					
2-A Ceiling Tile		Υ	Entry Ceiling		Fair	500'					
3-A Ceiling Tile		Υ	Master Bedroom Ceiling		Good	100'					
4-A Plaster		Υ	Master Bedroom Ceiling		Good	100'					
4-B Plaster		Υ	Master Bedro	oom Ceiling	Good	-					
4-C Plaster		Υ	Master Bedro	oom Ceiling	Good	-					
5-A Drywall		Υ	Living Ro	om Wall	Good	200'					
5-B Drywall	,	Υ	Living Ro	om Wall	Good	-					
Notes:											
Inspector Signature:			Date: 12/19/202	23	Time: 3:53	pm					
Accepted By: Will Sok	plawsk	×	Date: 17/19	123	Time: 3:5	55pm					
Lab Results Completed By:	<u> </u>	J	Date Sent Out:	12/22/23	Email	Mail					
Limitations of Incompations Atlanta shalls	ALIEDA CC I		1 12 24 1								

Limitations of Inspection: Attas Labs Inc. AHERA certified inspector performed a limited survey at the site, date, time and cause as stated above in this document along with lab analysis of possible asbestos and/or lead containing material. Atlas Labs Inc. survey is limited to areas defined on the Chain of Custody form.

General NESHAPS Bulk Sampling Guidelines: Material sampling areas were grouped based on homogenous materials. A homogeneous area is one which contains material that seems by texture, color and surface wear to be uniform and applied during the same general time period. Samples are collected based on a visual survey of the work area as defined in this report. Samples were collected from accessible, representative construction materials, which were suspected to contain asbestos. If additional materials are found during the demolition process that were inaccessible at time of inspection that are not listed in this report please test before you cut. Survey is subject to direction from contractor, homeowner or owners agent.

Atlas Labs

Approx. SQ FT.

100' 60' 80' 300' 10' 100' 2' 15' 50'
100' 60' 80' 300' 10' 100' 2' 15' 50' 20'
60' 80' 300' 10' 100' 2' 15' 50' 20'
80' 300' 10' 100' 2' 15' 50' 20'
300' 10' 100' 2' 15' 50' 20'
10' 100' 2' 15' 50' 20'
100' 2' 15' 50' 20'
2' 15' 50' 20'
15' 50' 20'
50' 20'
20'
5'
5'
10'
1'
140'
20'
100'
200'
-
-
3'
Unk.
Unk.
1700'
1500'
200'
1
+

Atlas Labs

Batch # 2022 *

Name / Company *

22-1031001

Julie Risto

Analysis Date *

Project Name

12/19/2023

Project #

PO #

Analyst *

Project Location *

Crossland Kapaun

20532 NE 194th Ave, Battle Ground, WA 98604

Turnaround Time *

5-Day

Asbestos Analysis of Bulk Material by Polarized Light Microscopy

Sample*	Layer*	Description*	Non Asbestos*	Asbestos Type*	Asbestos %*
1-A	1	Texture (Yellow) - Living Room Wall	Cellulose	None Present	N/D
1-A	2	Fiberboard (Brown) - Living Room Wall	Cellulose / Synthetic	None Present	N/D
1-B	1	Texture (Yellow) - Living Room Wall	Cellulose	None Present	N/D
1-B	2	Fiberboard (Brown) - Living Room Wall	Cellulose / Synthetic	None Present	N/D
1-C	1	Texture (Yellow) - Living Room Wall	Cellulose	None Present	N/D
1-C	2	Fiberboard (Brown) - Living Room Wall	Cellulose / Synthetic	None Present	N/D
2-A	1	Ceiling Tile (Brown) - Entry Ceiling	Cellulose	None Present	N/D
2-A	2	Mastic (Brown) - Entry Ceiling	Cellulose	None Present	N/D
3-A	1	Ceiling Tile (White) - Master Bedroom Ceiling	Synthetic	None Present	N/D
3-A	2	Mastic (Yellow) - Master Bedroom Ceiling	Cellulose	None Present	N/D
3-A	3	Mastic (Brown) - Master Bedroom Ceiling	Cellulose	None Present	N/D
4-A	1	Plaster (Grey / Brown) - Master Bedroom Ceiling	Cellulose	None Present	N/D

Sample*	Layer*	Description*	Non Asbestos*	Asbestos Type*	Asbestos %
4-B	1	Plaster (Grey / Brown) - Master Bedroom Ceiling	Cellulose	None Present	N/D
4-C	1	Plaster (Grey / Brown) - Master Bedroom Ceiling	Cellulose	None Present	N/D
5-A	1	Drywall (White) - Living Room Wall	Cellulose	None Present	N/D
5-A	2	Texture (Off White) - Living Room Wall	Cellulose	Chrysotile	2%
5-A	3	Joint Compound (Off White) - Living Room Wall	Cellulose	Chrysotile	2%
5-B	1	Drywall (White) - Living Room Wall	Cellulose	None Present	N/D
5-B	2	Texture (Off White) - Living Room Wall	Cellulose	Chrysotile	2%
5-C	1	Drywall (White) - Living Room Wall	Cellulose	None Present	N/D
5-C	2	Texture (Off White) - Living Room Wall	Cellulose	Chrysotile	2%
6-A	1	Drywall (White) - Living Room Wall	Cellulose	None Present	N/D
6-A	2	Mastic (Yellow) - Living Room Wall	Cellulose	None Present	N/D
7-A	1	Carpet (Yellow) - Sewing Room Floor	Cellulose	None Present	N/D
7-A	2	Carpet Pad (Yellow) - Sewing Room Floor	Synthetic	None Present	N/D
7-A	3	Carpet Mastic (Brown) - Sewing Room Floor	Cellulose	None Present	N/D
7-A	4	Vinyl (Grey) - Sewing Room Floor	Cellulose / Synthetic	None Present	N/D
8-A	1	Vinyl (Tan) - Master Bedroom Floor	Cellulose	None Present	N/D
8-A	2	Mastic (Brown) - Master Bedroom Floor	Cellulose	None Present	N/D
9-A	1	1st Layer Vinyl (Tan) - Living Room Floor	Cellulose	None Present	N/D
9-A	2	Mastic (Brown) - Living Room Floor	Cellulose	None Present	N/D
9-A	3	2nd Layer Vinyl (Tan) - Living Room Floor	Cellulose	None Present	N/D
9-A	4	Mastic (Brown) - Living Room Floor	Cellulose	None Present	N/D
9-A	5	3rd Layer Vinyl (Green) - Living Room Floor	Cellulose	None Present	N/D
9-A	6	Mastic (Brown) - Living Room Floor	Cellulose	None Present	N/D
10-A	1	Brick (Red) - Living Room Wall	Cellulose	None Present	N/D
10-A	2	Mortar (Grey) - Living Room Wall	Cellulose	None Present	N/D
10-A	3	Sealant (Grey) - Living Room Wall	Cellulose	None Present	N/D
11-A	1	Plaster (Grey) - Master Bedroom Wall	Cellulose / Horsehair	None Present	N/D
11-A	2	Wallpaper (Blue Floral) - Master Bedroom Wall	Cellulose	None Present	N/D
12-A	1	Vinyl (Red) - Kitchen Closet Shelf	Cellulose	Chrysotile	25%
13-A	1	VCT (Tan / Red) - Pantry Floor	Cellulose	None Present	N/D

Sample*	Layer*	Description*	Non Asbestos*	Asbestos Type*	Asbestos %*
13-A	2	VCT (Tan / Yellow) - Pantry Floor	Cellulose	None Present	N/D
13-A	3	VCT (Tan / Green) - Pantry Floor	Cellulose	None Present	N/D
13-A	4	VCT (Brown) - Pantry Floor	Cellulose	None Present	N/D
13-A	5	VCT (Brown / Tan) - Pantry Floor	Cellulose	None Present	N/D
13-A	6	VCT (Green) - Pantry Floor	Cellulose	None Present	N/D
13-A	7	VCT (Green / Off White) - Pantry Floor	Cellulose	None Present	N/D
13-A	8	VCT (Brown / Blue) - Pantry Floor	Cellulose	None Present	N/D
13-A	9	VCT (Grey) - Pantry Floor	Cellulose	None Present	N/D
13-A	10	VCT (Grey / Tan) - Pantry Floor	Cellulose	None Present	N/D
13-A	11	VCT (Tan / Red) - Pantry Floor	Cellulose	None Present	N/D
13-A	12	Mastic (Brown) - Pantry Floor	Cellulose	None Present	N/D
14-A	1	Tile (White) - Bathroom Wall	Cellulose	None Present	N/D
14-A	2	Mastic (Brown) - Bathroom Wall	Cellulose	None Present	N/D
15-A	1	Wall Panel (Blue / White) - Laundry Room Wall	Cellulose	None Present	N/D
15-A	2	Mastic (Brown) - Laundry Room Wall	Cellulose	None Present	N/D
16-A	1	Cove Base (Tan) - Bathroom Wall	Cellulose	None Present	N/D
16-A	2	Mastic (Brown) - Bathroom Wall	Cellulose	None Present	N/D
17-A	1	Cove Base (Brown) - Laundry Room Wall	Cellulose	None Present	N/D
17-A	2	Mastic (Tan) - Laundry Room Wall	Cellulose	None Present	N/D
18-A	1	Brick (Red) - Kitchen Wall	Cellulose	None Present	N/D
18-A	2	Sealant (Grey) - Kitchen Wall	Cellulose	None Present	N/D
19-A	1	Mortar (Tan) - Kitchen Wall	Cellulose	None Present	N/D
19-A	2	Stove Vent Pipe Sealant (White) - Kitchen Wall	Cellulose	None Present	N/D
20-A	1	1st Layer Vinyl (Off White / Beige) - Kitchen Floor	Cellulose	Chrysotile	25%
20-A	2	Mastic (Tan) - Kitchen Floor	Cellulose	Chrysotile	2%
20-A	3	2nd Layer Vinyl (Red / Blue / Brown) - Kitchen Floor	Cellulose	Chrysotile	25%
20-A	4	Mastic (Brown / Tan) - Kitchen Floor	Cellulose	Chrysotile	2%
20-A	5	3rd Layer Vinyl (Grey / Off White) - Kitchen Floor	Synthetic	None Present	N/D
20-A	6	Mastic (Brown) - Kitchen Floor	Cellulose	None Present	N/D
20-A	7	4th Layer Vinyl (Brown / Tan) - Kitchen Floor	Synthetic	None Present	N/D
20-A	8	Mastic (Brown) - Kitchen Floor	Cellulose	None Present	N/D
21-A	1	Vinyl (White / Beige) - Bathroom Floor	Cellulose /	None Present	N/D

Sample*	Layer*	Description*	Non Asbestos*	Asbestos Type*	Asbestos %*
			Fiberglass		
21-A	2	Mastic (Yellow) - Bathroom Floor	Cellulose	None Present	N/D
22-A	1	Vinyl (White / Beige / Gold) - Attic Floor	Cellulose	None Present	N/D
22-A	2	Mastic (Brown) - Attic Floor	Cellulose	None Present	N/D
23-A	1	Texture (White) - Attic Wall	Cellulose	None Present	N/D
23-B	1	Texture (White) - Attic Wall	Cellulose	None Present	N/D
23-C	1	Texture (White) - Attic Wall	Cellulose	None Present	N/D
24-A	1	Vinyl (Beige / Tan / Gold) - Attic Bedroom Closet Floor	Cellulose	Chrysotile	25%
25-A	1	Window Glaze (Grey) - Left Exterior Window	Cellulose	Chrysotile	2%
26-A	1	Window Glaze (Off White) - Back Exterior Window	Cellulose	None Present	N/D
27-A	1	Siding (Brown) - Exterior Siding	Cellulose	None Present	N/D
28-A	1	Shingle (Black / White) - Front Roof	Fiberglass	None Present	N/D
28-A	2	Shingle (White / Black) - Front Roof	Fiberglass	None Present	N/D
28-A	3	Tar Paper (Black) - Front Roof	Cellulose	None Present	N/D
29-A	1	Shingle (White / Black) - Back Roof	Fiberglass	None Present	N/D

To Be Filled by the Technician


Technician *

CK

Atlas Laboratories maintains liability to cost of analysis. This report relates only to the samples reported and may not be reproduced, except in full without written permission by Atlas. Atlas bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. This report must not be used by the client to claim product certification, approval or endorsement by NVLAP, NIST, NIOSH or any other agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore Atlas recommends gravimetric reduction prior to analysis. Samples received in good condition unless otherwise noted. Transmission Electron Microscopy asbestos identification and lead paint analysis will be available and performed by laboratories by proxy. Original analysis documents are available upon request of the client.



APPENDIX B

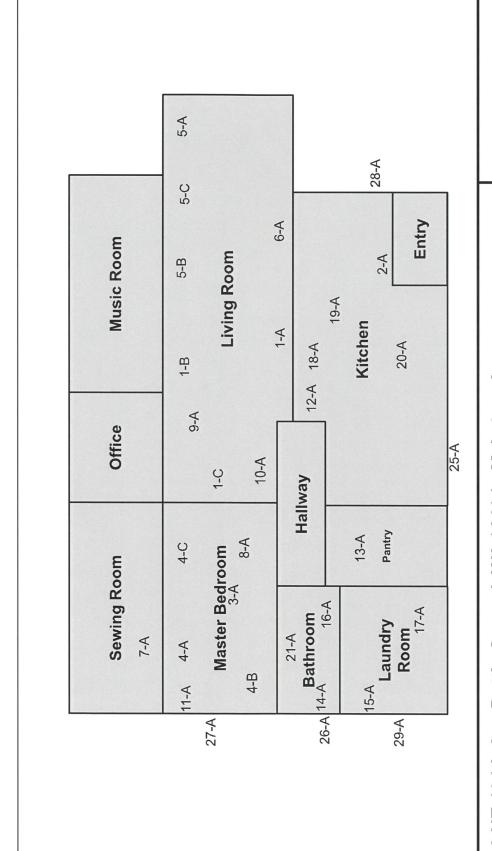

20532 NE 194th Ave Battle Ground, WA 98604 - Main Level

Suspect Asbestos Containing Sample Locations





Atlas Labs

20532 NE 194th Ave Battle Ground, WA 98604 - Attic

Suspect Asbestos Containing Sample Locations



APPENDIX C

THIS IS TO CERTIFY THAT

JOEL DILLARD

HAS SUCCESSFULLY COMPLETED THE TRAINING COURSE

for

ASBESTOS INSPECTOR INITIAL COURSE

In accordance with TSCA Title II, Part 763, Subpart E, Appendix C of 40 CFR

Course Date: 6/12/2023 - 6/14/2023

Course Location:

Portland, OR

N PBS

IN-23-1415C

Certificate:

For verification of the authenticity of this

certificate contact:

PBS Engineering and Environmental Inc.

4412 S Corbett Avenue

Portland, OR 97239

503.248.1939

CCB #SRA0614 24-Hr Training

24-Hour AHERA Inspector Training; AHERA is the Asbestos Hazard Emergency Response Act enacting Title II of Toxic Substance Control Act (TSCA)

Expiration Date: 06/14/2

Surles Fielly

Andy Fridley, Instructor