



December 7, 2022

Mr. Daniel Hermann
Fred Meyer Stores, Inc.
PO Box 42121
Portland, OR 97242

Subject: Final Approval for Removal of Stage II Vapor Recovery Equipment

Dear Mr. Hermann:


A final determination to issue Air Discharge Permit (ADP) 22-3553 has been completed for ADP Application CL-3215 pursuant to Section 400-110(4) of the General Regulations for Air Pollution Sources of the Southwest Clean Air Agency (SWCAA). Public notice for Air Discharge Permit Application CL-3215 was published in the permit section of SWCAA's internet website on November 4, 2022. SWCAA did not receive a request for a public comment period in response to the public notice and has concluded that significant public interest does not exist for this determination. Therefore, a public comment period was not provided for this permitting action. Electronic copies of Air Discharge Permit 22-3553 and the associated Technical Support Document are available for public review in the "Recent Air Discharge Permits" section under the "Air Permits" link on SWCAA's website (<http://www.swcleanair.gov>). Original copies are enclosed for your files.

Please note that this permit limits gasoline throughput to 6,450,000 gallons per year. If actual throughput exceeds expectations and is projected to exceed 6,450,000 gallons on an annual basis, you will need to contact SWCAA for a permit modification.

This Air Discharge Permit may be appealed directly to the Pollution Control Hearings Board (PCHB) at PO Box 40903, Olympia, Washington 98504-0903 as provided in RCW 43.21B within 30 days of receipt.

If you have any comments, or desire additional information, please give Clint Lamoreaux or me a call at (360) 574-3058, extension 131.

Sincerely,

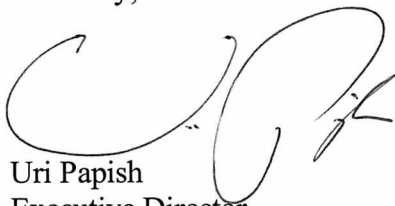

Uri Papish
Executive Director

UP: cl

Enclosures: Technical Support Document and Air Discharge Permit 22-3553





SWCAA
Southwest Clean Air Agency

**AIR DISCHARGE PERMIT
22-3553**

Issued: December 7, 2022

Fred Meyer Gasoline No. 614
410 NW 12th Ave., Battle Ground, WA

SWCAA ID – 2107

REVIEWED BY:

Clinton Lamoreaux, Chief Engineer



APPROVED BY:

Uri Papish, Executive Director

TABLE OF CONTENTS

| <u>Section</u> | <u>Page</u> |
|--|-------------|
| 1. Equipment/Activity Identification | 1 |
| 2. Permit Requirements | 1 |
| Emission Limits | 1 |
| Operating Limits and Requirements | 1 |
| Monitoring and Recordkeeping Requirements | 2 |
| Emission Monitoring and Testing Requirements | 3 |
| Reporting Requirements | 4 |
| 3. General Provisions | 4 |

1. Equipment/Activity Identification

| ID No. | Equipment/Activity | Control Equipment/Measure |
|---------------|-------------------------------------|----------------------------------|
| 1 | Retail Gasoline Dispensing Facility | Stage I Vapor Recovery Systems |

2. Permit Requirements

The following tables detail the specific requirements of this Air Discharge Permit (ADP). In addition to the requirements listed below, equipment at this facility may be subject to other federal, state, and local regulations. The requirement number is identified in the left-hand column. The text of the requirement is contained in the middle column. The emission unit, equipment, or activity to which the requirement applies is listed in the right-hand column.

Air Discharge Permit 00-2314 is superseded in its entirety by this Air Discharge Permit.

Emission Limits

| Req. No. | Emission Limits | Equipment/Activity ID No. |
|-----------------|---|----------------------------------|
| 1. | Emissions of volatile organic compounds must not exceed 5.52 tons in any calendar year. | 1 |

Operating Limits and Requirements

| Req. No. | Operating Limits and Requirements | Equipment/Activity ID No. |
|-----------------|---|----------------------------------|
| 2. | The permittee must use recognized good practice and procedures to reduce odors to a reasonable minimum. | 1 |
| 3. | Gasoline throughput must not exceed 6,450,000 gallons per year. | 1 |
| 4. | The Stage I vapor recovery systems must be connected and properly operated at all times during fuel receiving operations. | 1 |
| 5. | As installed, the end of the submerged fill line must be totally submerged when the liquid level in the tank is six inches from the bottom of the tank. | 1 |
| 6. | Each nozzle from which gasoline is dispensed must have a maximum fuel flow rate not to exceed ten (10) gallons per minute. | 1 |
| 7. | Whenever a Stage I vapor recovery system component is determined to be defective or not operating properly, the system must be removed from service until repairs can be completed. | 1 |

| Req. No. | Operating Limits and Requirements | Equipment/ Activity ID No. |
|-----------------|---|-----------------------------------|
| 8. | Pressure/vacuum valve(s) must be installed and maintained with a positive pressure setting of 2.5 – 6.0 inches water column and a negative pressure setting of 6.0 – 10.0 inches water column. The leak rate of each pressure/vacuum valve, including connections, must not exceed 0.05 cubic foot per hour at a pressure of 2.0 inches water column and 0.21 cubic foot per hour at a vacuum of 4 inches water column. The total leak rate for all pressure/vacuum valves, including connections, must not exceed 0.17 cubic foot per hour at a pressure of 2.0 inches water column and 0.63 cubic foot per hour at a vacuum of 4 inches water column. | 1 |
| 9. | No alterations of equipment, parts, design, or operation of the Stage I gasoline vapor recovery systems as certified by CARB are allowed without prior approval from SWCAA. | 1 |
| 10. | Spill buckets must be maintained free of liquid and solid materials. | 1 |
| 11. | Only unihose style gasoline dispensers may be used (one gasoline hose and nozzle per fueling point), except when dispensing both alcohol-containing gasoline and alcohol-free gasoline at a single fueling point. Two hoses may be used, one for alcohol-containing gasoline and one for alcohol-free gasoline, at fueling points dispensing both of those fuel types. | 1 |
| 12. | All gasoline dispensing hoses must be low permeation hoses. Low permeation hoses are hoses that permeate no more than 10.0 grams per square meter per day, as determined by Underwriters Laboratories' Standard 330. | 1 |
| 13. | All gasoline dispensing nozzles must be Enhanced Conventional (ECO) nozzles. ECO nozzles are conventional nozzles that comply with CARB performance standards in Certification Procedure 207 (CP-207). | 1 |

Monitoring and Recordkeeping Requirements

| Req. No. | Monitoring and Recordkeeping Requirements | Equipment/ Activity ID No. |
|-----------------|---|-----------------------------------|
| 14. | All maintenance and repairs to vapor recovery systems and equipment must be recorded for each occurrence. | 1 |
| 15. | The total gasoline throughput must be recorded for each calendar year. | 1 |
| 16. | Each record required by this Air Discharge Permit must include the date and the name of the person making the record entry. | 1 |
| 17. | All records required by this Air Discharge Permit (including the results of all required monitoring or testing and all required reports) must be readily available for a minimum period of no less than five years and must be available for inspection by SWCAA representatives. | 1 |

Emission Monitoring and Testing Requirements

| Req. No. | Emission Monitoring and Testing Requirements | Equipment/ Activity ID No. |
|-----------------|--|-----------------------------------|
| 18. | <p>The following testing must be conducted and passed for each gasoline storage tank prior to placing the equipment into service following the removal of Stage II vapor recovery, and at least once every 12 months thereafter, no later than the end of the calendar month during which the initial test was conducted. This testing must be conducted using the latest version of the following procedures:</p> <p>(a) CARB Test Procedure 201.3 (TP-201.3) "Determination of 2 Inch w.c. Static Pressure Performance of Vapor Recovery Systems of Dispensing Facilities."</p> <p>This facility is required to utilize pressure/vacuum valves with a minimum design cracking pressure of 2.5 inches water column; therefore, static pressure performance testing of the underground storage tanks must be conducted with the valves installed, without bagging the valves, and without obstructing pipe connections to the valves.</p> <p>The minimum allowable final pressure after 5 minutes with an initial pressure of 2.0 inches w.c. is provided by the equation $P_f = 2e^{-500.887/v}$.</p> <p><u>Where:</u> P_f = Minimum allowable final pressure, inches of water v = Total ullage affected by the test, gallons e = Dimensionless constant equal to approximately 2.718 2 = The initial pressure, inches water</p> | 1 |
| 19. | <p>The following testing must be conducted and passed for each pressure/vacuum valve at least once every 36 months in accordance with SWCAA 491. The first test must be conducted concurrent with the first static pressure decay test (TP-201.3) following issuance of this Air Discharge Permit except as described below. This testing must be conducted using the following procedure:</p> <p>(a) CARB Test Procedure 201.1E (TP-201.1E) "Leak Rate and Cracking Pressure of Pressure/Vacuum Vent Valves" adopted October 8, 2003.</p> <p>The pressure/vacuum valves proposed for, and allowed for use at, this facility are required to be factory tested prior to sale/installation. For a new pressure/vacuum valve, the factory test satisfies the requirement for an initial test; therefore, the first test is due 36 months after initial installation of a new pressure/vacuum valve. If a new pressure/vacuum valve is installed in lieu of testing, installation of the new valve must be documented in lieu of generating a test report.</p> | 1 |

Reporting Requirements

| Req. No. | Reporting Requirements | Equipment/ Activity ID No. |
|-----------------|--|-----------------------------------|
| 20. | The permittee must notify SWCAA in writing within ten (10) calendar days after completing removal of Stage II vapor recovery equipment. This will allow proper inspections and observations to be conducted for the new equipment. | 1 |
| 21. | The results of testing required by this Permit must be reported to SWCAA within 14 calendar days of test completion. Where a factory test of a newly installed pressure/vacuum valve is relied upon in lieu of a new test conducted in accordance with CARB Test Procedure TP-201.1E, documentation of installation of the new pressure/vacuum valve must be submitted in lieu of the test results. | 1 |
| 22. | Excess emissions must be reported to SWCAA as follows: (a) As soon as possible, but no later than 12 hours after discovery for emissions that represent a potential threat to human health or safety; (b) As soon as possible, but no later than 48 hours after discovery for emissions which the permittee wishes to claim as unavoidable pursuant to SWCAA 400-107; and (c) For all other excess emissions, no later than 30 calendar days after the end of the month during which the deviation is discovered. | Facility-wide |
| 23. | Deviations from permit conditions must be reported no later than 30 calendar days after the end of the month during which the deviation is discovered. | Facility-wide |
| 24. | Gasoline throughput must be reported annually to SWCAA by January 31 st for the previous calendar year unless otherwise directed by SWCAA. | 1 |
| 25. | Air emissions of criteria air pollutants, volatile organic compounds, toxic air pollutants (TAPs), and hazardous air pollutants (HAPs) must be reported annually to SWCAA by January 31 st for the previous calendar year unless otherwise directed by SWCAA. | 1 |

3. General Provisions

| Req. No. | General Provisions |
|-----------------|---|
| A. | The emission units specified in this Permit must be maintained and operated in total and continuous conformity with the emission limits identified in this Permit. SWCAA reserves the right to take any and all appropriate action to maintain the conditions of this Permit, including directing the facility to cease operations until corrective action can be completed. |
| B. | For the purpose of ensuring compliance with this Permit, duly authorized representatives of the Southwest Clean Air Agency must be permitted access to the permittee's premises and the facilities being constructed, owned, operated and/or maintained by the permittee for the purpose of inspecting said facilities. These inspections are required to determine the status of compliance with this Permit and applicable regulations and to perform or require such tests as may be deemed necessary. |

| Req. No. | General Provisions |
|-----------------|--|
| C. | The provisions, terms and conditions of this Permit bind the Permittee, its officers, directors, agents, servants, employees, successors and assigns, and all persons, firms, and corporations acting under or for the Permittee. |
| D. | The requirements of this ADP survive any transfer of ownership of the source or any portion thereof. |
| E. | This ADP must be posted conspicuously at or be readily available near the source. |
| F. | This ADP will be invalidated, in whole or in part, if construction or installation of any new or modified equipment has not commenced within eighteen (18) months from date of issuance, if construction is discontinued for a period of eighteen (18) months or more without prior SWCAA approval, or if construction is not completed within a reasonable time. |
| G. | This ADP does not supersede requirements of other Agencies with jurisdiction and further, this ADP does not relieve the Permittee of any requirements of any other governmental Agency. In addition to this ADP, the Permittee may be required to obtain permits or approvals from other agencies with jurisdiction. |
| H. | Compliance with the terms of this ADP does not relieve the Permittee from the responsibility of compliance with SWCAA General Regulations for Air Pollution Sources, previously issued Regulatory Orders, RCW 70A.15, Title 173 WAC or any other applicable emission control requirements, nor from the resulting liabilities and/or legal remedies for failure to comply. |
| I. | If any provision of this ADP is held to be invalid, all unaffected provisions of the ADP will remain in effect and be enforceable. |
| J. | No change in this ADP will be made or be effective except as may be specifically set forth by written order of the Southwest Clean Air Agency upon written application by the Permittee for the relief sought. |
| K. | The Southwest Clean Air Agency may, in accordance with RCW 70A.15, impose such conditions as are reasonably necessary to assure the maintenance of compliance with the terms of this ADP, the Washington Clean Air Act, and the applicable rules and regulations adopted under the Washington Clean Air Act. |